

1-6. Noise Criterion Curves


(A) Indoor Units:

Wall Mounted Type

—●— Strong
-○- Weak


MODEL	: S-36PK1E5A
SOUND LEVEL	: STRONG 35 dB(A)
	High 31 dB(A)
	Low 27 dB(A)

CONDITION : 1m in front of air discharge and then 1m below

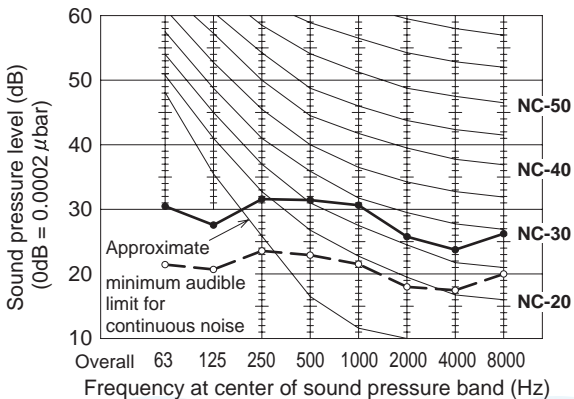


MODEL	: S-50PK1E5A
SOUND LEVEL	: STRONG 40 dB(A)
	High 36 dB(A)
	Low 32 dB(A)

CONDITION : 1m in front of air discharge and then 1m below

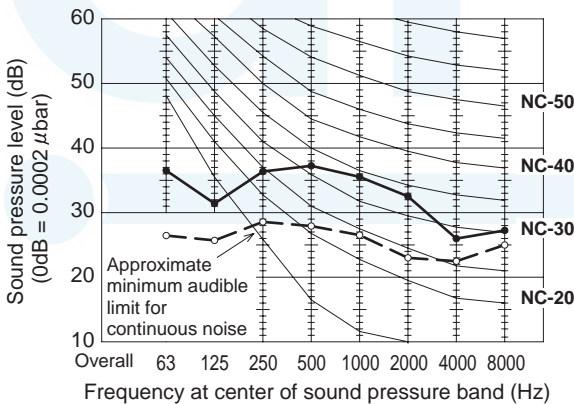


MODEL	: S-100PK1E5A
SOUND LEVEL	: STRONG 49 dB(A)
	High 45 dB(A)
	Low 41 dB(A)

CONDITION : 1m in front of air discharge and then 1m below

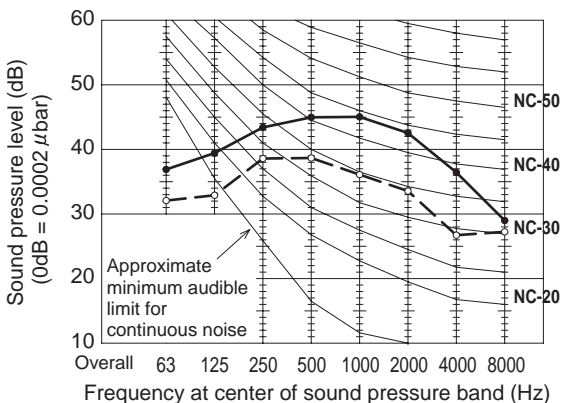

MODEL	: S-45PK1E5A
SOUND LEVEL	: STRONG 38 dB(A)
	High 34 dB(A)
	Low 30 dB(A)

CONDITION : 1m in front of air discharge and then 1m below

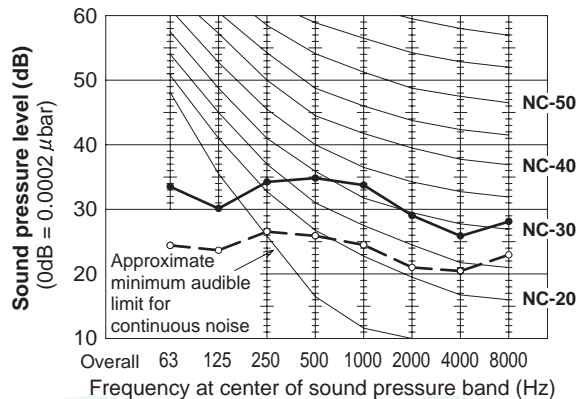

MODEL	: S-60PK1E5A, S-71PK1E5A
SOUND LEVEL	: STRONG 47 dB(A)
	High 44 dB(A)
	Low 40 dB(A)

CONDITION : 1m in front of air discharge and then 1m below

