


1. 4-Way Cassette Type (Type U2)

1-4. Noise Criterion Curves


Both 50Hz and 60Hz

—●— High
-○- Low


MODEL	: S-22MU2E5A/28MU2E5A/36MU2E5A
SOUND LEVEL :	HIGH 30 dB(A)
	LOW 28 dB(A)
CONDITION	: 1.5 m directly below unit

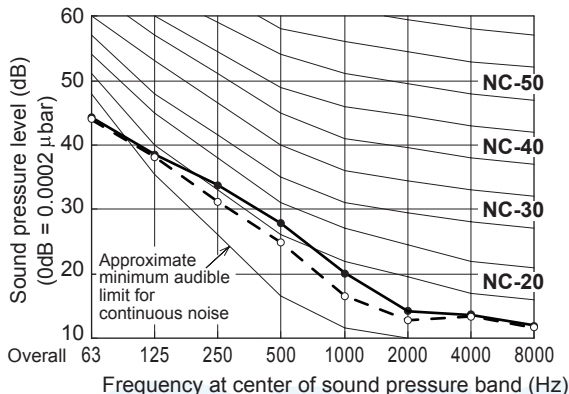


MODEL	: S-45MU2E5A
SOUND LEVEL :	HIGH 31 dB(A)
	LOW 28 dB(A)
CONDITION:	1.5 m directly below unit

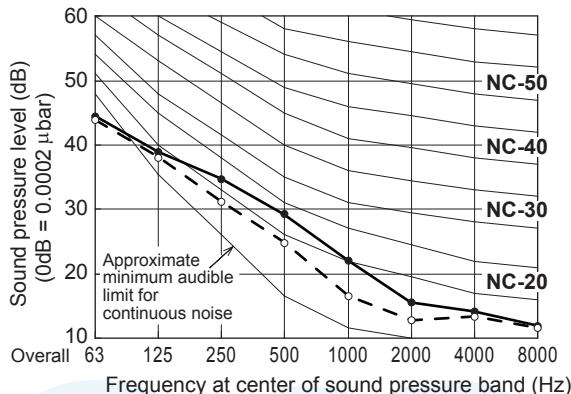


MODEL	: S-56MU2E5A
SOUND LEVEL :	HIGH 32 dB(A)
	LOW 28 dB(A)
CONDITION	: 1.5 m directly below unit

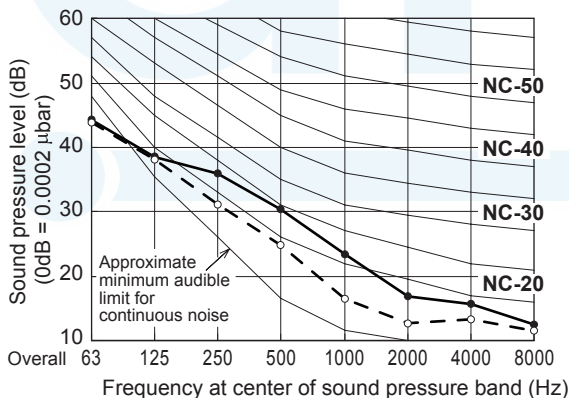


MODEL:	S-60MU2E5A
SOUND LEVEL:	HIGH 36 dB(A)
	LOW 29 dB(A)
CONDITION:	1.5 m directly below unit

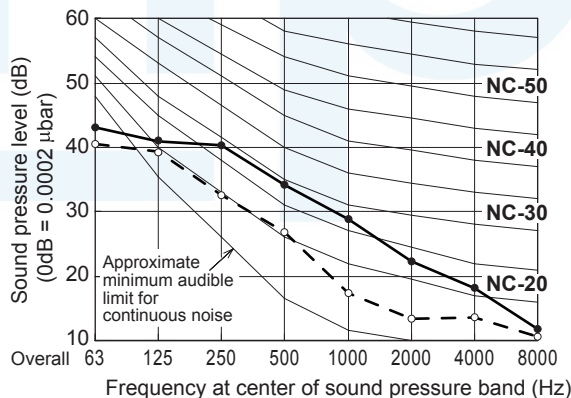

MODEL	: S-73MU2E5A
SOUND LEVEL :	HIGH 37 dB(A)
	LOW 29 dB(A)
CONDITION	: 1.5 m directly below unit

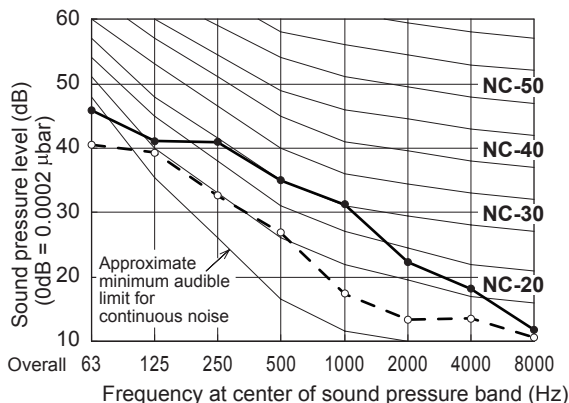

MODEL:	S-90MU2E5A
SOUND LEVEL:	HIGH 38 dB(A)
	LOW 32 dB(A)
CONDITION:	1.5 m directly below unit

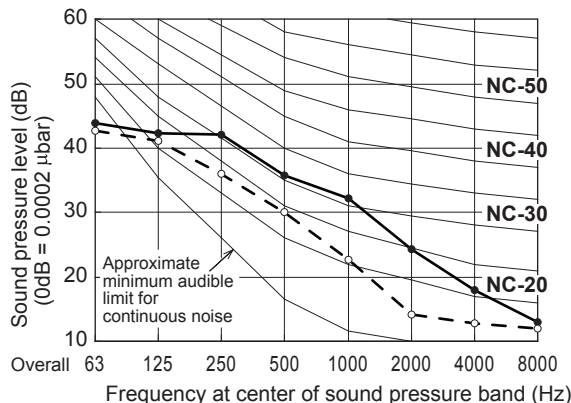

4